

# CMT-74132 DATASHEET

Version: 1.5

15-Dec-23

(Last Modification Date)

## High-Temperature, Quad 2-Input NAND Schmitt Trigger

### General Description

The CMT-74132 contains four independent 2-input NAND gates with Schmitt Trigger, performing the Boolean function :

$$Y = \overline{A \cdot B}$$

The gate switches at different points for positive and negative going signals. The difference between the positive voltage  $V_{T+}$  and the negative voltage  $V_{T-}$  is defined as the hysteresis voltage  $V_H$

The CMT-74132 can operate with supply voltages from 3.3 to 5V ( $\pm 10\%$ ).


### Features

- Qualified from -55 to +175°C ( $T_J$ )
- 3.3 to 5V ( $\pm 10\%$ ) supply voltages
- Latchup-free at any supply and temperature condition
- Validated at 175°C for 20000 hours (and still on-going)
- Available in plastic SOIC16 standard package

### Applications

- High temperature logic
- Noise immunity function
- Sensor interface
- Signal processing/conditioning

### Package and Pin Configuration

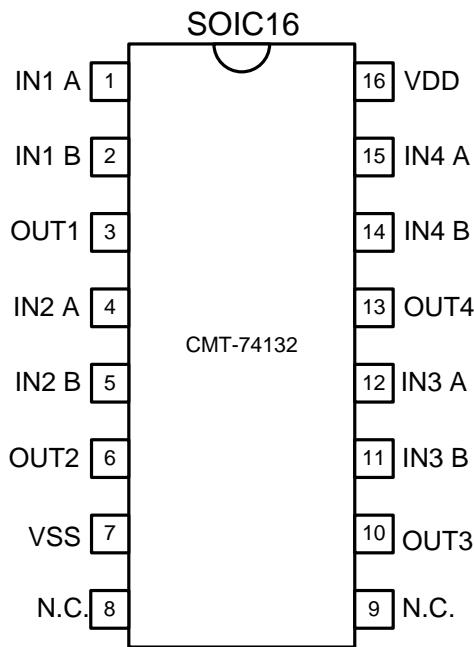

Pin	Symbol	Description
1	IN1 A	Input A of the NAND gate number 1
2	IN1 B	Input B of the NAND gate number 1
3	OUT1	Output of the NAND gate number 1
4	IN2 A	Input A of the NAND gate number 2
5	IN2 B	Input B of the NAND gate number 2
6	OUT2	Output of the NAND gate number 2
7	VSS	Circuit core ground terminal.
8	N.C.	No connected terminal.
9	N.C.	No connected terminal.
10	OUT3	Output of the NAND gate number 3
11	IN3 B	Input B of the NAND gate number 3
12	IN3 A	Input A of the NAND gate number 3
13	OUT4	Output of the NAND gate number 4
14	IN4 B	Input B of the NAND gate number 4
15	IN4 A	Input A of the NAND gate number 4
16	VDD	Circuit core power supply terminal.

## Function Table

INPUT		OUTPUT
A	B	Y
L	L	H
L	H	H
H	L	H
H	H	L

## Function and Logical Diagrams

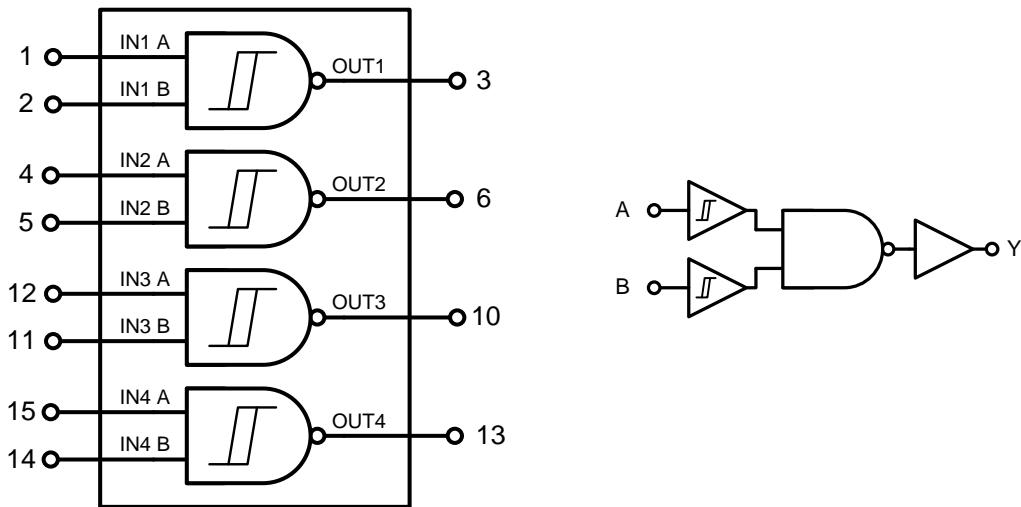


Figure 1. CMT-74132: simplified block diagram.

**Absolute Maximum Ratings**

Supply Voltage $V_{DD}$ to GND	-0.5 to 5.5V
Voltage on any Pin to GND	-0.5 to $V_{DD}+0.5V$

**Operating Conditions**

Supply Voltage $V_{DD}$ to GND	3.3V to 5V ( $\pm 10\%$ )
Junction temperature	-55°C to +175°C

**ESD Rating (expected)**

Human Body Model	>1kV
------------------	------

**DC Electrical Characteristics**

Unless otherwise stated:  $VDD=5V$ ,  $T_j=25^\circ C$ . **Bold** figures indicate values valid over the whole temperature range ( $-55^\circ C < T_j < +175^\circ C$ ).

Parameter	Condition	Min	Typ	Max	Units
Supply voltage $V_{DD}$			5V		V
Quiescent current $I_{DD}$	$T_j=-55^\circ C$		0.02		nA
	$T_j=225^\circ C$		1240		
Minimum HIGH level output voltage $V_{OH}$	$I_{OH}<4mA$ (source)	4.4			V
Maximum LOW level output voltage $V_{OL}$	$I_{OL}<4mA$ (sink)			0.63	V
Minimum HIGH level input voltage $V_{T+}$	$T_j=-55^\circ C$		3.30		V
	$T_j=25^\circ C$		3.30		
	$T_j=225^\circ C$		3.19		
Maximum LOW level input voltage $V_{T-}$	$T_j=-55^\circ C$		2.12		V
	$T_j=25^\circ C$		2.14		
	$T_j=225^\circ C$		2.18		
Hysteresis voltage $V_H$	$T_j=-55^\circ C$		1.18		V
	$T_j=25^\circ C$		1.16		
	$T_j=225^\circ C$		1.01		

## DC Electrical Characteristics (cntd)

Unless otherwise stated: VDD=3.3V,  $T_j=25^\circ\text{C}$ . **Bold** figures indicate values valid over the whole temperature range ( $-55^\circ\text{C} < T_j < +175^\circ\text{C}$ ).

Parameter	Condition	Min	Typ	Max	Units
Supply voltage $V_{DD}$			3.3		V
Quiescent current $I_{DD}$	$T_j=-55^\circ\text{C}$		0.015		nA
	$T_j=225^\circ\text{C}$		940		
Minimum HIGH level output voltage $V_{OH}$	$I_{OH}<2\text{mA}$ (source)		2.4		V
Maximum LOW level output voltage $V_{OL}$	$I_{OL}<2\text{mA}$ (sink)			0.44	V
Minimum HIGH level input voltage $V_{T+}$	$T_j=-55^\circ\text{C}$		2.28		V
	$T_j=25^\circ\text{C}$		2.23		
	$T_j=225^\circ\text{C}$		2.17		
Maximum LOW level input voltage $V_{T-}$	$T_j=-55^\circ\text{C}$		1.23		V
	$T_j=25^\circ\text{C}$		1.28		
	$T_j=225^\circ\text{C}$		1.43		
Hysteresis voltage $V_H$	$T_j=-55^\circ\text{C}$		1.05		V
	$T_j=25^\circ\text{C}$		0.95		
	$T_j=225^\circ\text{C}$		0.74		

## AC Electrical Characteristics

Unless otherwise stated: VDD=5V,  $T_j=25^\circ\text{C}$ . **Bold** figures indicate values valid over the whole temperature range ( $-55^\circ\text{C} < T_j < +175^\circ\text{C}$ ).

Parameter	Condition	Temperature	Min	Typ	Max	Units
$t_{PHL}$ Propagation delay time from A or B to Y <sup>1</sup>	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		8.8		ns
		$T_j=25^\circ\text{C}$		10.23		
		$T_j=225^\circ\text{C}$		13.68		
$t_{PLH}$ Propagation delay time from A or B to Y	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		9.69		ns
		$T_j=25^\circ\text{C}$		11.42		
		$T_j=225^\circ\text{C}$		16.1		
$t_{THL}$ Output transition time High to Low	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		8.17		ns
		$T_j=25^\circ\text{C}$		11.47		
		$T_j=225^\circ\text{C}$		16.39		
$t_{TLH}$ Output transition time Low to High	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		9.92		ns
		$T_j=25^\circ\text{C}$		12		
		$T_j=225^\circ\text{C}$		15.4		

<sup>1</sup> Input A is 1% to 2% faster than input B.

## AC Electrical Characteristics (cntd)

Unless otherwise stated: VDD=3.3V,  $T_j=25^\circ\text{C}$ . **Bold** figures indicate values valid over the whole temperature range ( $-55^\circ\text{C} < T_j < +175^\circ\text{C}$ ).

Parameter	Condition	Temperature	Min	Typ	Max	Units
Propagation delay time from A or B to Y $t_{PHL}$	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		13.81		ns
		$T_j=25^\circ\text{C}$		16.25		
		$T_j=225^\circ\text{C}$		21.14		
Propagation delay time from A or B to Y $t_{PLH}$	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		15.6		ns
		$T_j=25^\circ\text{C}$		19.3		
		$T_j=225^\circ\text{C}$		25.19		
Output transition time High to Low $t_{THL}$	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		14.04		ns
		$T_j=25^\circ\text{C}$		18.21		
		$T_j=225^\circ\text{C}$		23.46		
Output transition time Low to High $t_{TLH}$	$C_L=50\text{pF}$	$T_j=-55^\circ\text{C}$		13.78		ns
		$T_j=25^\circ\text{C}$		14.65		
		$T_j=225^\circ\text{C}$		21.3		

## AC Waveforms


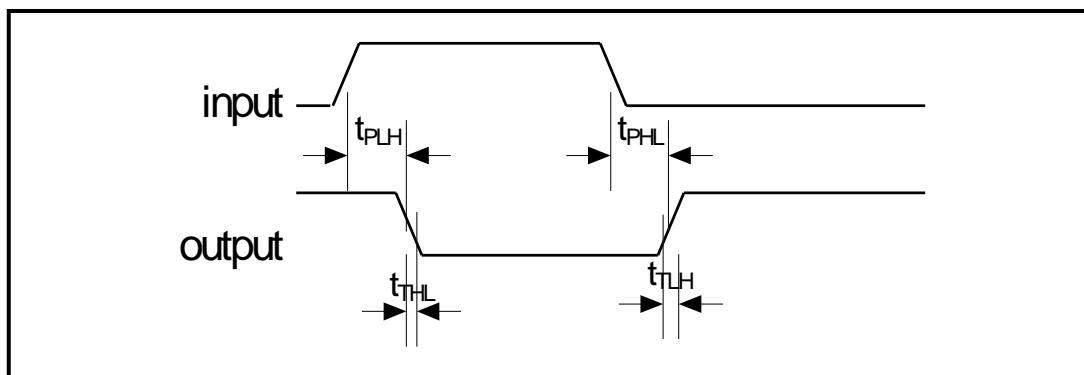


Figure 2. AC Waveforms

## Ordering Information

Ordering Reference	Package	Temperature Range	Marking
CMT-74132-PSOIC16-T	Plastic SOIC16	-55°C to +175°C	CMT-74132

## Package dimensions

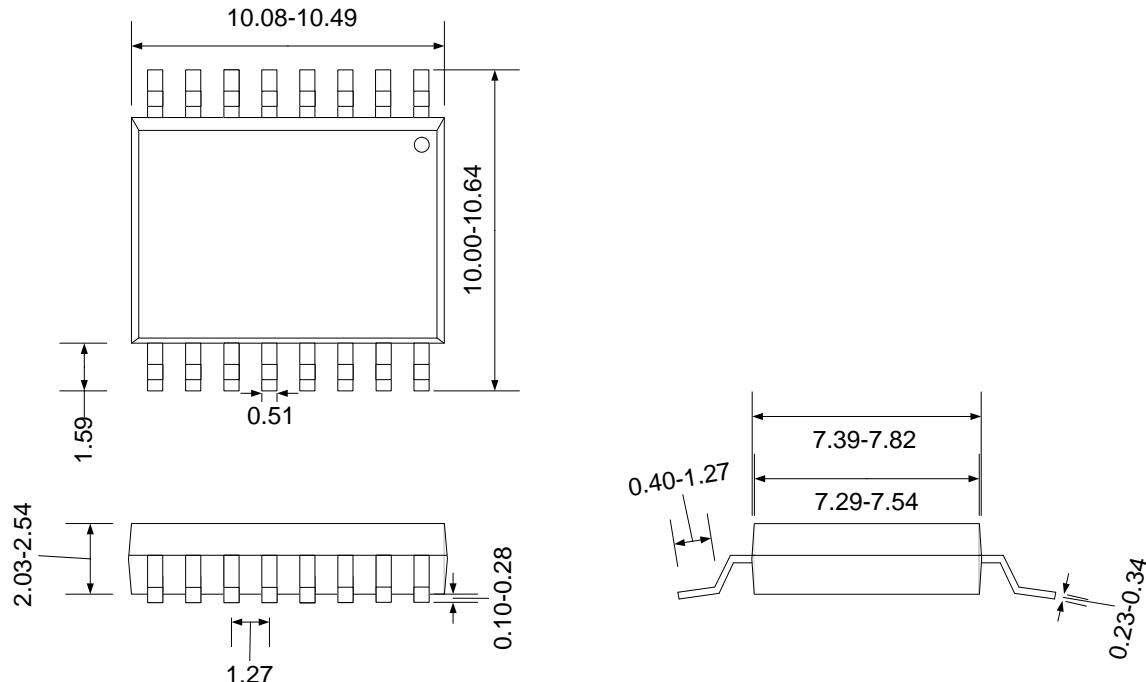

Drawing PSOIC16 (mm +/- 10%)

## Contact & Ordering

### CISSOID S.A.

<b>Headquarters and contact EMEA:</b>	CISSOID S.A. – Rue Francqui, 11 – 1435 Mont Saint Guibert - Belgium T : +32 10 48 92 10 - F: +32 10 88 98 75 Email: <a href="mailto:sales@cissoid.com">sales@cissoid.com</a>
<b>Sales Representatives:</b>	Visit our website: <a href="http://www.cissoid.com">http://www.cissoid.com</a>

### Disclaimer

*Neither CISSOID, nor any of its directors, employees or affiliates make any representations or extend any warranties of any kind, either express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, and the absence of latent or other defects, whether or not discoverable. In no event shall CISSOID, its directors, employees and affiliates be liable for direct, indirect, special, incidental or consequential damages of any kind arising out of the use of its circuits and their documentation, even if they have been advised of the possibility of such a damage. The circuits are provided "as is". CISSOID has no obligation to provide maintenance, support, updates, or modifications.*