

**CHT-IO-1210****PRELIMINARY DATASHEET****High Temperature 1200V/10A
Silicon Carbide Schottky Diode**

Version: 1.0

General description

CHT-IO-1210 high temperature 1200V/10A Silicon Carbide Schottky Diode is designed to achieve high performance in an extremely wide temperature range: typical operation temperature goes from -55°C to 210°C while keeping leakage current low.

This device is packaged in a hermetically sealed TO-257 metal package especially designed and qualified to sustain high temperature and power cycling. This package offers high voltage isolation between pins and with respect to the case, facilitating the mounting on a heatsink.

The diode can be used in a variety of applications, including rectification, free-wheeling, clamping and general purpose.

Features


- Specified from **-55 to +210°C** (T_j)
- Reverse voltage: $V_R = 1200V$ (max)
- Forward current: $I_F = 10A$ (max @ 210°C (T_j) and $V_F = 1.7V$)
- Forward voltage: $V_F=1.2V$ (typ. @ 25°C (T_j) and $I_F=10A$)
- Junction capacitance: $C_J=93pF$ (typ. @ $V_R = 400V$)
- Hermetically sealed TO-257 metal package
- Pins electrically isolated from the case

Applications

- Free Wheeling
- Full bridge rectification
- Power supplies
- General purpose diode

Package Configuration

FRONT VIEW

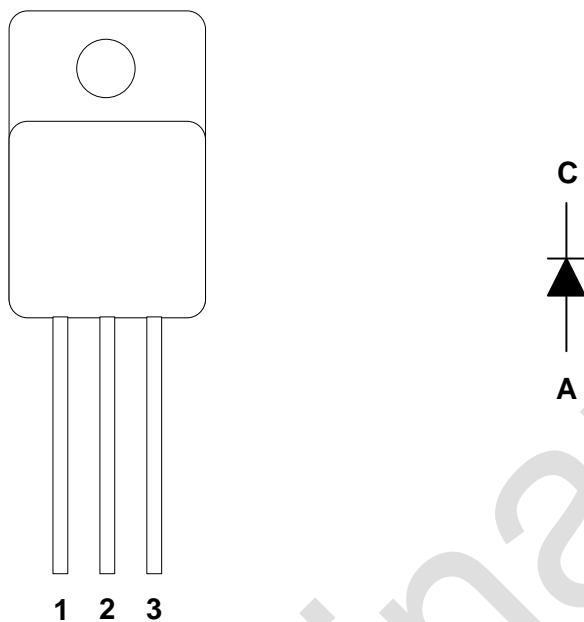

TO257 (Pin1= Cathode; Pin2= Anode Pin3= NC) (case floating)

Preliminary

Absolute Maximum Ratings

Reverse voltage V_R
Forward surge current I_{FSM}
Junction temperature T_j

1200V
12A
210°C

Operating Conditions

Reverse voltage V_R
Continuous forward current I_F
Forward voltage V_F
Junction temperature

0V to 1200V
0A to 10A
0V to 3.5V
-55°C to +210°C

Preliminary

Electrical characteristics

Unless otherwise stated, $T_j = 25^\circ\text{C}$. **Bold** figures point out values valid over the whole temperature range ($T_j = -55^\circ\text{C}$ to $+210^\circ\text{C}$).

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F=10\text{A}, T_j=25^\circ\text{C}$		1.5		V
		$I_F=10\text{A}, T_j=210^\circ\text{C}$		1.7		V
Reverse leakage current	I_R	$V_R=1200\text{V}, T_j=25^\circ\text{C}$		20		μA
		$V_R=1200\text{V}, T_j=210^\circ\text{C}$		500		uA
Breakdown reverse voltage	$V_{(BR)}$		1200			V
Junction capacitance	C_J	$V_R=400\text{V}, T_j=25^\circ\text{C}, f= 100\text{kHz}$		93		pF

Thermal Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Junction-to-Case Thermal resistance	$R_{\Theta JC}$			1.1		$^\circ\text{C/W}$

Preliminary

Typical performances

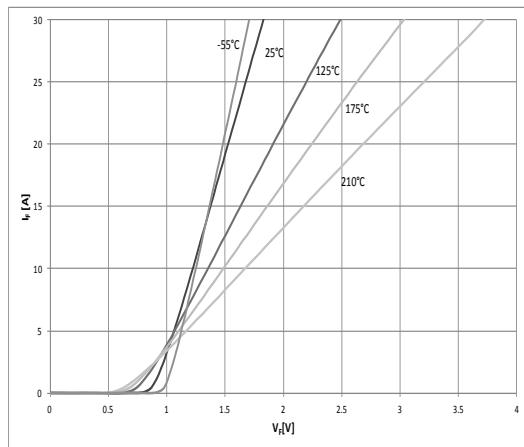


Figure 1: Diode I_F vs V_F

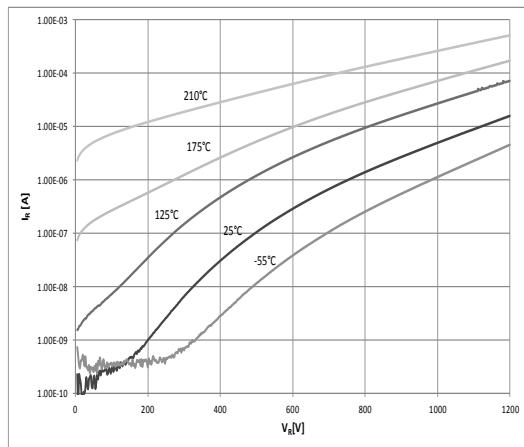


Figure 2: Diode I_R vs V_R

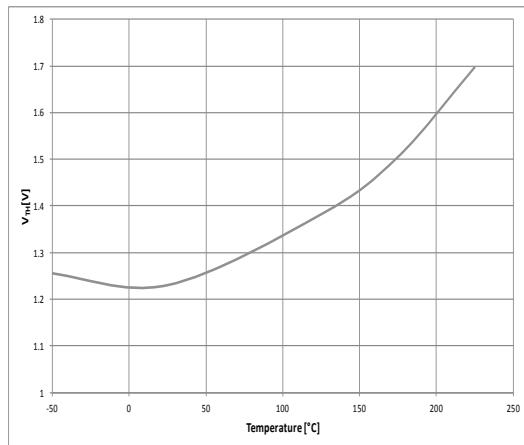


Figure 3: Diode V_F vs Temp ($I_F = 10$ A)


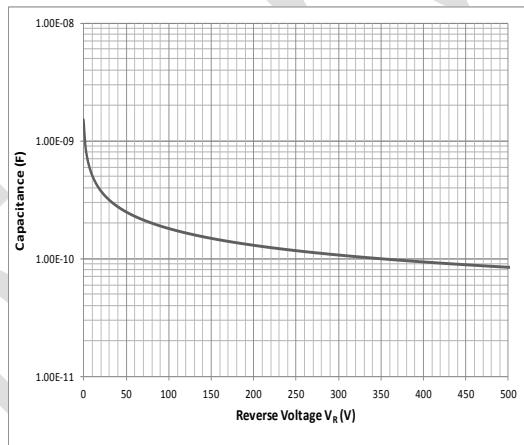


Figure 4: Typical capacitance vs V_R
($T_j=25^\circ\text{C}$; $f = 100$ kHz, $V_{AC} = 25\text{mV}$)

Package Dimensions

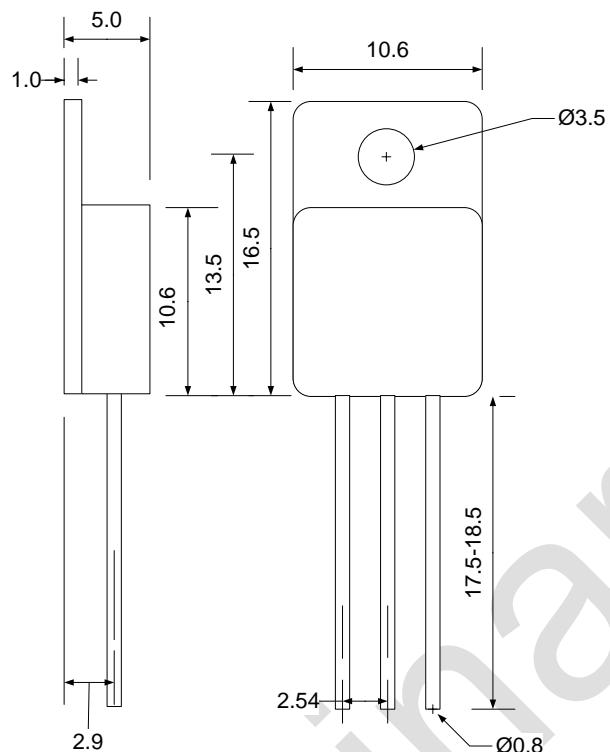

TO257 dimensions in mm (+/- 10%)

Ordering Information

Product Name	Ordering Reference	Package	Marking
CHT-IO-1210	CHT-PLA1122A-TO257-T	TO257	CHT-PLA1122A

Contact & Ordering

CISSOID S.A.

Headquarters and contact EMEA:	CISSOID S.A. – Rue Francqui, 3 – 1435 Mont Saint Guibert - Belgium T : +32 10 48 92 10 - F: +32 10 88 98 75 Email: sales@cissoid.com
Sales Representatives:	Visit our website: http://www.cissoid.com

Disclaimer

Neither CISSOID, nor any of its directors, employees or affiliates make any representations or extend any warranties of any kind, either express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, and the absence of latent or other defects, whether or not discoverable. In no event shall CISSOID, its directors, employees and affiliates be liable for direct, indirect, special, incidental or consequential damages of any kind arising out of the use of its circuits and their documentation, even if they have been advised of the possibility of such a damage. The circuits are provided "as is". CISSOID has no obligation to provide maintenance, support, updates, or modifications.